


ITEM	QTY -041	P/N	DESCRIPTION
1	X	D4836-041	AFT LEG ASSEMBLY, LH
2	1	D4808-041	ROD END BEARING ASSEMBLY
3	1	D4836-1	STRUT
4	1	D4869-1	END FITTING, EYE
5	4	HL20PB5-8	HI-LOK PIN
6	4	HL86-5	HI-LOK COLLAR

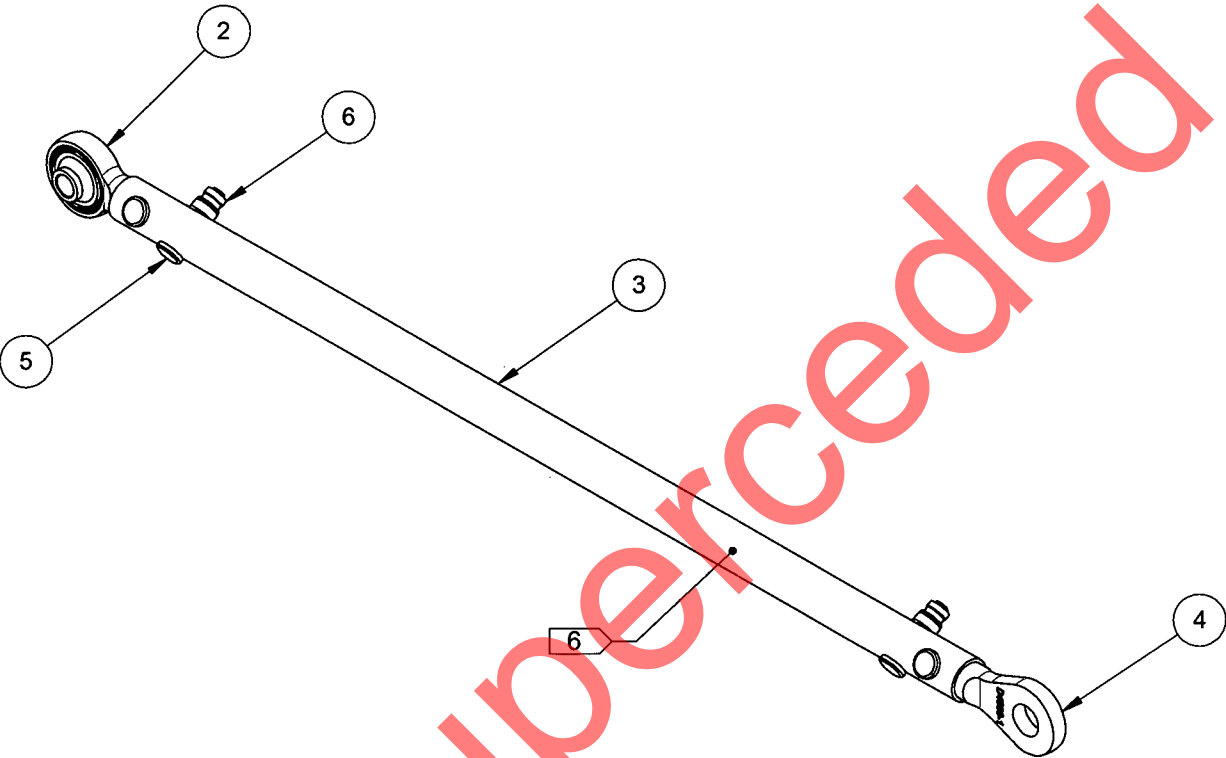

D4836-041 AFT LEG ASSEMBLY, LH
(EQUIVALENT TO BELL P/N 206-064-107-101/-109)

RELEASED
2014 -06- 16

- NOTES:
- 1) MATERIAL: N/A
 - 2) FINISH: N/A
 - 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
 - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
 - 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
 - 6) IDENTIFICATION: IDENTIFY PER QSI 044 6.8
 - 7) WEIGHT: 0.45 lbs
 - 8) ALIGN PILOT HOLES IN D4836-1 WITH PILOT HOLES IN D4869-1 & D4808-041.
DRILL OUT EACH HOLE USING A P/N 13-SB65 (0.125) PILOTED DRILL.
REAM EACH HOLE USING P/N 31-219 (Ø 0.1610) REAMER, USING DART TOOL SETUP DT9958
 - 9) INSTALL PIN/COLLAR AND END FITTING WITH HYSOL EA934NA OR MAGNOBOND 6398 ADHESIVE WHILE STILL WET
 - 10) ASSEMBLE PER DART TOOL DT9958
 - 11) INSTALL HL20PB5-8 HI-LOK IN ORIENTATION SHOWN

APPROVED

B	REVISE NOTES 6), 7) & 9) (ZN A8-1); ADDED BELL P/N	RF	14.04.08
A	NEW ISSUE	RF	13.09.16
REV.	DESCRIPTION	BY	DATE
DESIGN	RF	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	RF		
CHECKED	VS	DRAWING NO.	REV. B
MFG. APPR.	JFS	D4836	SHEET 1 OF 3
APPROVED	HS	TITLE	SCALE
DE APPR.	DS	LEG ASSEMBLY	NTS
DATE	14.04.08	COPYRIGHT © 2013 BY DART AEROSPACE LTD <small>THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.</small>	



8 7 6 5 4 3 2 1

D


C

B

A

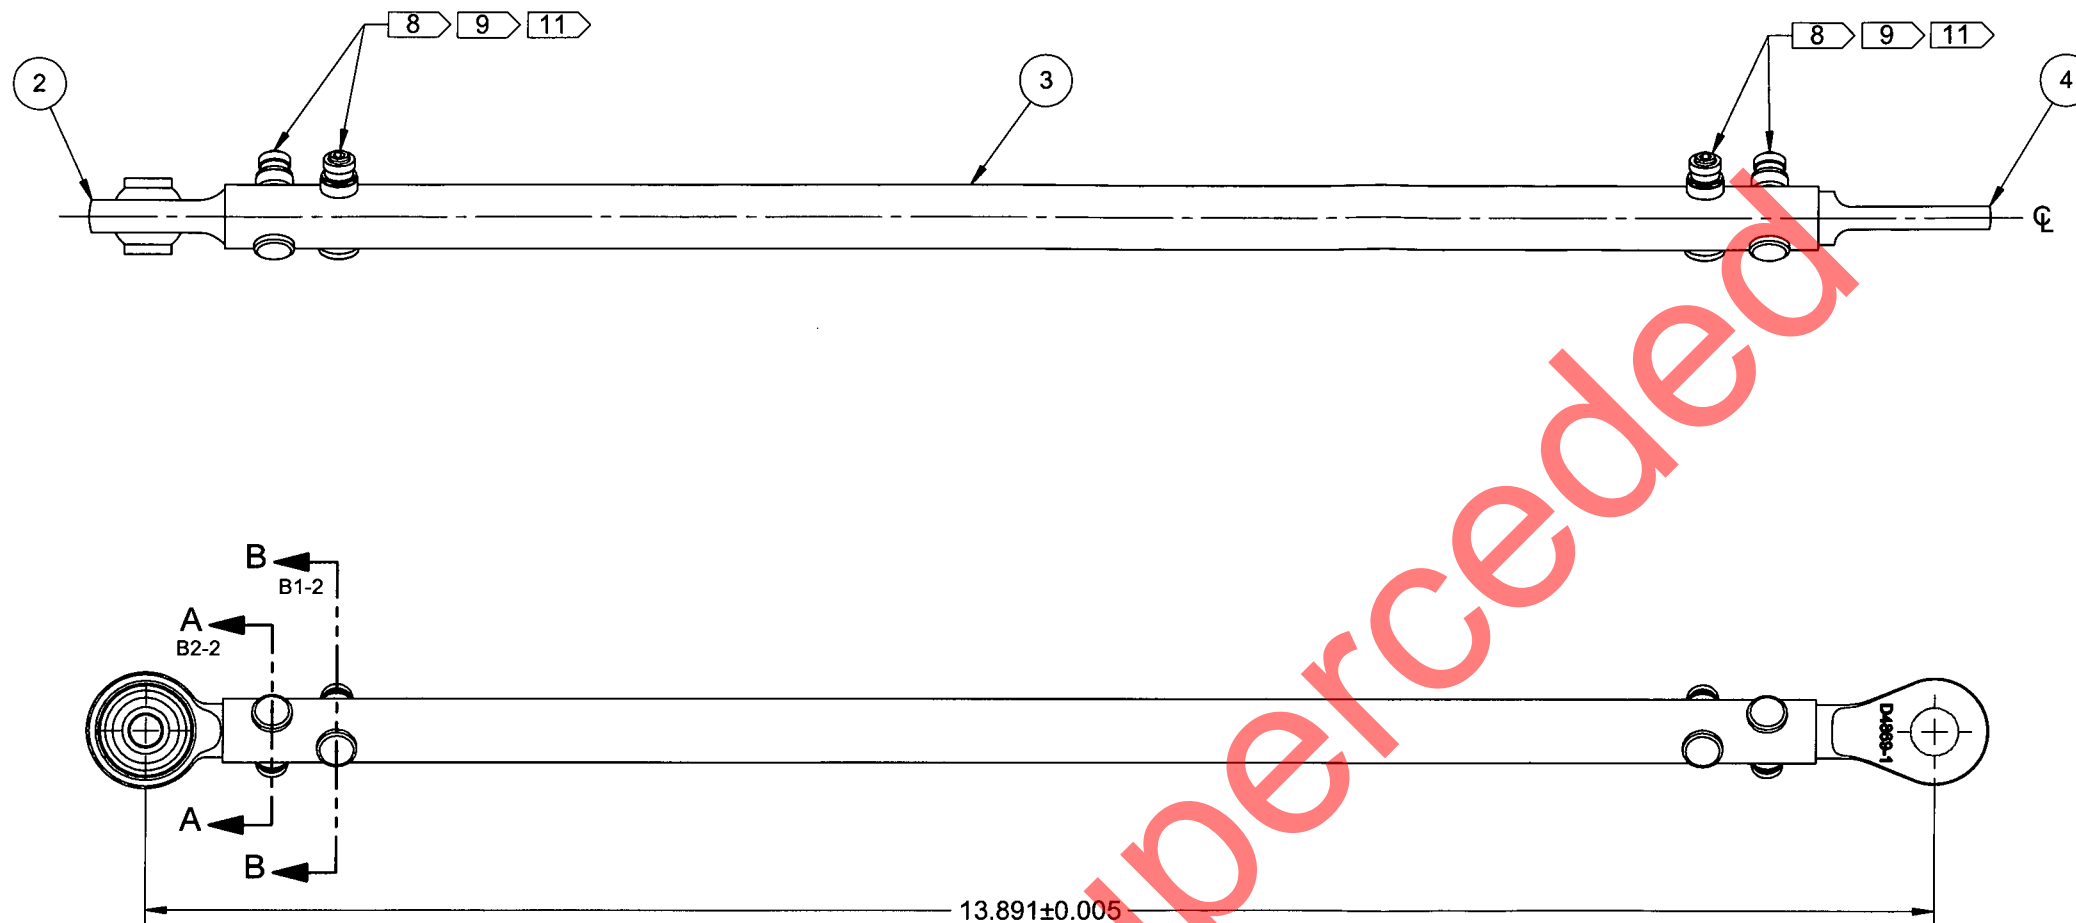

SECTION A-A C8-2
2 PL



SECTION B-B C7-2
2 PL


D4836-041 AFT LEG ASSEMBLY, LH
AUXILIARY VIEW

RELEASED
2014 -06- 16
WP


APPROVED

DESIGN	RF	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	RF		
CHECKED	VS	DRAWING NO.	REV. B
MFG. APPR.	JFS	D4836	SHEET 2 OF 3
APPROVED	HS	TITLE	SCALE
DE APPR.	DS	LEG ASSEMBLY	NTS
DATE	14.04.08	COPYRIGHT © 2013 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	


8 7 6 5 4 3 2 1

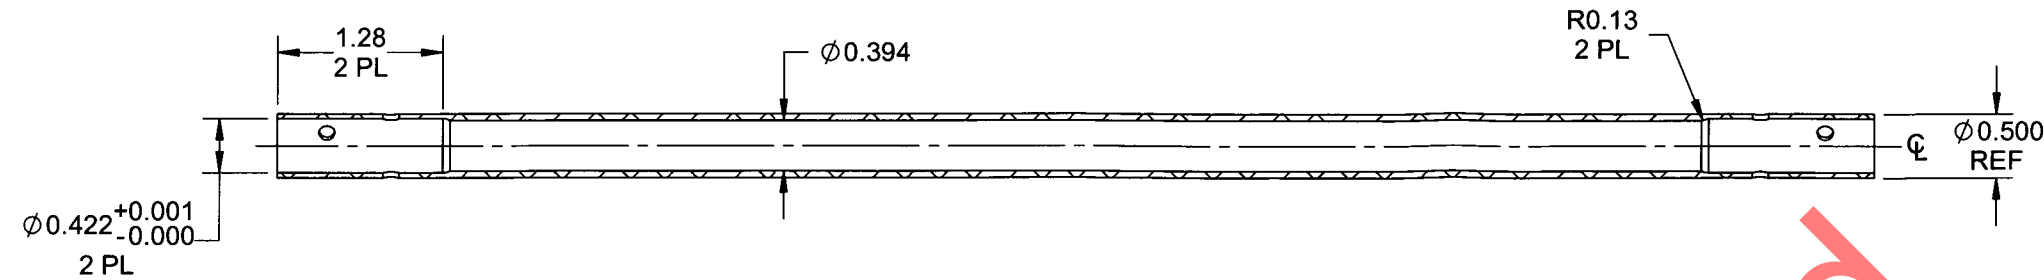


SECTION C-C B3-3

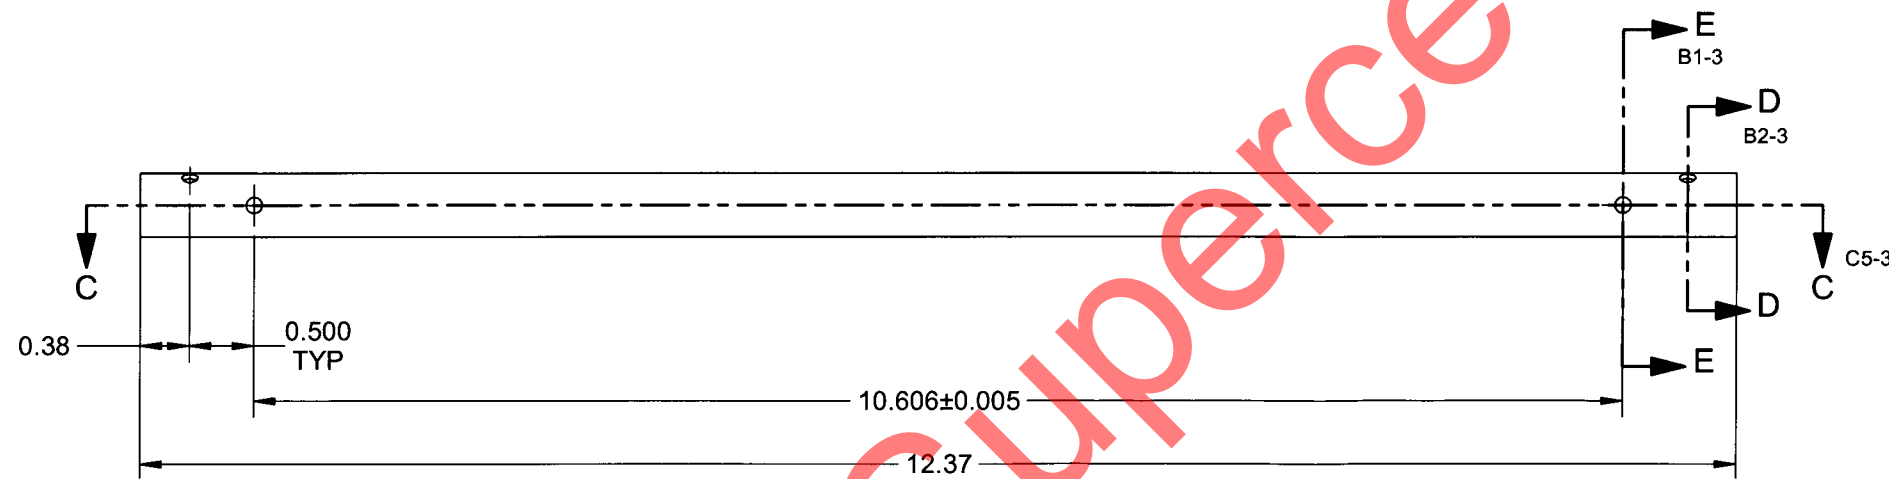

D4836-1 STRUT



SECTION D-D C3-3
2 PL



SECTION E-E C4-3
2 PL

RELEASED
2014-06-16
WMP

NOTES:

- 1) MATERIAL: 17-4 PH/S17400/TYPE 630 SS ROUND BAR, H900 CONDITION
PER AMS 5643/ASTM A564
DART SPEC M17-4-R
- 2) FINISH: N/A
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: N/A
- 7) WEIGHT: 0.25 lbs
- 8) LIQUID PENETRANT INSPECT PER QSI 038 6.1.1 (ASTM E1417 LEVEL 2)

APPROVED

DESIGN	RF	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	RF		
CHECKED	VS	DRAWING NO. D4836	REV. B
MFG. APPR.	JFS	SHEET 3 OF 3	
APPROVED	HS	TITLE	SCALE
DE APPR.	DS	LEG ASSEMBLY	NTS
DATE	14.04.08	<small>COPYRIGHT © 2013 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.</small>	